# WORLD INTELLECTUAL PROPERTY ORGANIZATION International Bureau



# INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6:

(11) International Publication Number:

WO 98/22690

E21B 17/08, 43/10, 43/08, F16L 13/14

(43) International Publication Date:

28 May 1998 (28.05.98)

(21) International Application Number:

PCT/EP97/06671

(22) International Filing Date:

21 November 1997 (21.11.97)

(30) Priority Data:

96203272.8 22 November 1996 (22.11.96) (34) Countries for which the regional or international application was filed:

GB et al.

(71) Applicant (for all designated States except CA): SHELL INTERNATIONALE RESEARCH MAATSCHAPPIJ B.V. [NL/NL]; Carel van Bylandtlaan 30, NL-2596 HR The Published Hague (NL).

(71) Applicant (for CA only): SHELL CANADA LIMITED [CA/CA]; 400 - 4th Avenue, S.W., Calgary, Alberta T2P 2H5 (CA).


(72) Inventor: LOHBECK, Wilhelmus, Christianus, Maria; Volmerlaan 6, NL-2288 GD Rijswijk (NL).

(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, GH, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TI, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TI, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, TT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CO, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). ML, MR, NE, SN, TD, TG).

With international search report.

Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.

(54) Title: CONNECTOR FOR AN EXPANDABLE TUBING STRING

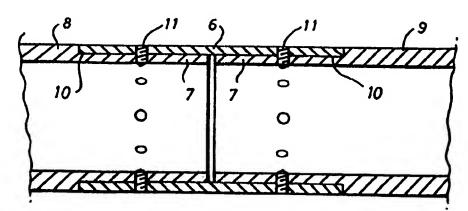

(57) Abstract

A connector for interconnecting a pair of adjacent sections (8 and 9) of an expandable tubing string comprises a plastically expandable sleeve (6) that is arranged co-axially around or inside the ends (7) of the interconnected tubing sections (8 and 9) and a series of circumferentially spaced mechanical fasteners (5), such as screws or rivets, for fastening the sleeve to each of said ends (7).

#### FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	· LS	Lesotho	SI	Slovenia
AM	Armenia	PI	Finland	LT	Lithragia	SK	Slovakia
AT	Austria	FR	Prance	w	Luxenbourg	SN	
ΑU	Austrafia	GA	Gabon	LV	Latvia	SZ	Senegal Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chid
BA	Bosnia and Herzegovina	CE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	CH	Ghasa	MG	Madagascur	T.	Talikistan
BE .	Belgium	GN	Guinea	MK	The former Yugoslav	TM	Turkmenisma
BY	Burkina Paso	GR	Greece		Republic of Macedonia	TR	
BG	Bulgaria	HU	Hungary	ML	Mail	II	Turkey
BJ	Benin	IR	Ireland	MN	Mongolia	UA	Trinidad and Tobago
BR	Brazil	1L	Israel	MR	Mauritania	UG	Ukraine
BY	Belarus	15	Sceland	MW	Malawi	us	Uganda
CA	Canada	17	Raly	MX	Mexico	UZ	United States of America
CF	Central African Republic	JP	Japan	NE	Niger	VN	Uzbekistan
CC	Congo	KR	Kenya	NL	Netherlands	YU	Vict Nam
CH	Switzertand	KG	Kyrgyzstan	NO	Norway	zw	Yugoslavia
a	Côte d'Ivoire	KP	Democratic People's	NZ	New Zeahad	ZW	Zimbabwe
CM	Caracroca		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ.	Kazakstan	RO	Romania		
CZ	Czech Republic	ıc	Saint Lucia	RU	Russian Federation		
DE	Germany	ü	Lichtenstein	80	Sudan		
DK	Denough .	LK	Sri Lanka	SE.	Sweden		
EE	Estonia	LR	Liberia	5G	Singapore		,

10

15

20

25

### CONNECTOR FOR AN EXPANDABLE TUBING STRING

The invention relates to a connector for use in connecting sections of an expandable tubing string, and in particular but not exclusively for use in the connection of sections of an expandable slotted tubing (EST) string as utilized in downhole applications in oil and gas production operations.

Expandable slotted tubings are known from International patent application No. PCT/EP 93/01460. This prior art reference discloses a slotted tube which may be expanded downhole by running an expansion mandrel through the tubing whereby the slots are expanded to diamond-shaped apertures.

When a tubing is expanded it is desirable that this can be accomplished by a substantially uniform expansion force, also at the locations where adjacent tubing sections are interconnected.

It is therefore an object of the present invention to provide a connector for an expandable tubing that can be expanded smoothly and made up easily without requiring welding operations.

The connector according to the invention thereto comprises a plastically expandable sleeve that is in use arranged co-axially relative to an end of each of the adjacent tubing sections, and means for fastening the sleeve to said ends.

Preferably the outer surface of an end of each of the adjacent tubing sections has been machined away to form an annular recess in which the sleeve is located.

10

15

20

25

30

Alternatively the inner surface of an end of each of the adjacent tubing sections has been machined away to form an annular recess in which the sleeve is located.

It is preferred that the thickness of the sleeve is substantially equal to the depth of the annular recess so that a flush-type connection is created.

It is furthermore preferred that the fastening means comprise a series of circumferentially spaced screws that pass through holes that are drilled through the sleeve and the adjacent wall of ends of the adjacent tubing sections. If desired the screws may be replaced by rivets or other mechanical fasteners.

The connector according to the invention is particularly attractive for interconnecting sections of an expandanble string of oil and/or gas well tubulars that may be slotted. If the connector is used for interconnecting sections of an expandable slotted tubing string then the sleeve is provided with a series of staggered substantially longitudinal slots which are deformable into diamond-shaped apertures upon expansion of the sleeve.

Further aspects, details, objects and advantages of the connector according to the invention will become apparent from the accompanying claims, abstract, drawings and detailed description with reference to the drawings.

The invention will now be described in more detail with reference to the accompanying drawings, in which

Fig. 1 shows a schematic side view of a plastically expandable connector according to the invention which surrounds ends of adjacent expandable slotted tubing sections;

Fig. 2 shows a schematic longitudinal sectional view of a flush-type connector according to the invention which surrounds ends of adjacent expandable tubing sections; and

Fig. 3 shows a schematic longitudinal sectional view of a flush-type connector according to the invention which is surrounded by ends of adjacent expandable tubing sections.

5

10

15

20

25

30

Referring now to Fig. 1, there is shown a connector comprising a plastically deformable slotted sleeve 1 that co-axially surrounds ends of a pair of adjacent slotted tubing sections 2 and 3. The sleeve 1 and tubing sections are each provided with a series of staggered and partially overlapping slots 4 that deform to substantially diamond shaped apertures (not shown) upon expansion of the assembly by e.g. running an expansion mandrel (not shown) through the interior of the tubing sections 2 and 3.

One or more series of circumferentially spaced Allen-type or other locking screws 5 fasten the sleeve 1 to each of the tubing sections 2 and 3 such that the inner surface of the sleeve 1 engages the outer surface of the end of each tubing section 2 and 3 both before, during and after the expansion process. The screws 5 are located in nodes between slots 4.

Referring now to Fig. 2 there is shown a flush-type connector comprising a plastically deformable solid or slotted sleeve 6 that surrounds ends 7 of adjacent solid or slotted tubing sections 8 and 9, which ends 7 have been machined away to form an annular recess 10 in which the sleeve 6 is located. The thickness of the sleeve 6 substantially equals the depth of the recess 10 to form a flush-type connector.

WO 98/22690 PCT/EP97/06671

- 4 -

The connector furthermore comprises a series of circumferentially spaced Allen-type or other locking screws 11 to fasten the sleeve 6 to each of the tubing sections 8 and 9 such that the inner surface of the sleeve 6 engages the outer surface of the ends 7 of the adjacent tubing sections 8 and 9 both before, during and after the expansion process.

5

10

15

20

25

Referring now to Figure 3 there is shown a flush-type connector comprising a plastically deformable solid or slotted sleeve 16 that is surrounded by ends 17 of adjacent solid or slotted tubing sections 18 and 19, respectively, which ends 17 have been machined away to form an annular recess 20 in which the sleeve 16 is located. The thickness of the sleeve substantially equals the depth of the recess 20 to form a flush-type connector that smoothly deforms plastically together with the ends of the tubing sections 18 and 19 during the expansion process.

The connector of Fig. 3 furthermore comprises a series of circumferentially spaced Allen-type locking screws 21 to fasten the sleeve 16 to each of the tubing sections 18 and 19 such that the outer surface of the sleeve 16 firmly engages the inner surface of the ends 17 of the adjacent tubing sections 8 and 9 both before, during and after the expansion process.

20

25

#### CLAIMS

- 1. A connector for interconnecting adjacent sections of a tubing string, the connector comprising a sleeve that is in use arranged co-axially relative to an end of each of the adjacent tubing sections, and means for fastening the sleeve to said ends, characterized in that the sleeve is plastically expandable and is useable for interconnecting sections of an expandable tubing string.
- 2. The connector of claim 1, wherein the sleeve is designed for interconnecting sections of an expandable slotted tubing string and is provided with a series of staggered substantially longitudinal slots which are deformable into diamond-shaped apertures upon expansion of the sleeve.
- 3. The connector of claim 1, wherein the sleeve is designed for interconnecting sections of an expandable string of oil and/or gas well tubulars.
  - 4. The connector of claim 1, wherein the outer surface of an end of each of the adjacent tubing sections has been machined away to form an annular recess in which the sleeve is located.
  - 5. The connector of claim 1, wherein the inner surface of an end of each of the adjacent tubing sections has been machined away to form an annular recess in which the sleeve is located.
  - 6. The connector of claim 4 or 5, wherein the thickness of the sleeve is substantially equal to the depth of the annular recess.

7. The connector of any preceding claim, wherein the fastening means comprise a series of circumferentially spaced screws that pass through holes that are drilled through the sleeve and the adjacent wall of ends of the adjacent tubing sections.

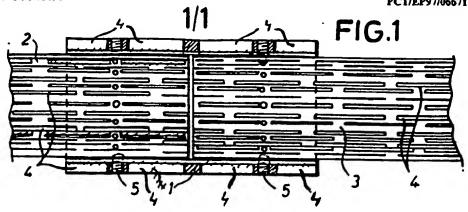


FIG.2


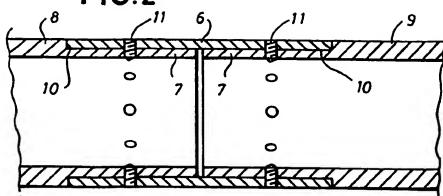


FIG.3

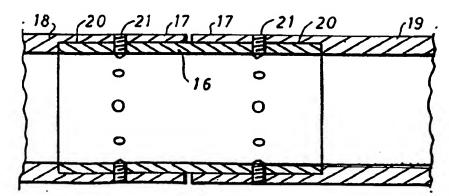

Inte Jonal Application No PCT/EP 97/06671

4 6: :::	500 500 05 010 1500 · · · · ·		
A. CLASS	FICATION OF SUBJECT MATTER E21B17/08 E21B43/10 E21B43/	08 F16L13/14	
According t	o International Patent Classification(IPC) or to both national classific	ation and IPC	
	SEARCHED		
IPC 6			
	tion searched other than minimum documentation to the extent that e		
Electronic	ista base consulted during the international search (name of data be	se and, where practical, search terms used	)
C. DOCUM	ENTS CONSIDERED TO BE RELEVANT		
Category :	Citation of document, with indication, where appropriate, of the ref	evant passages	Relevant to claim No.
X	US 3 948 321 A (OWEN) 6 April 19 see column 5, line 13 - line 50 see column 7, line 37 - line 41	76	1,3-6
Y			2
Y	US 5 366 012 A (LOHBECK) 22 Nover cited in the application see the whole document	mber 1994	2 .
X	US 3 863 959 A (BLASCHKE) 4 Febru see abstract	uary 1975	1,3-7
<b>X</b>	DE 24 34 298 A (HERMANN YON RAUTI INTERNATIONALE TIEFBOHR KG ITAG) January 1976 see page 4, line 9 - page 5, line	29	1,3-7
		-/	
X Furth	ner documents are Ested in the continuation of box C.	Patent family members are Ested.	in annox.
"A" docume consid "E" earlier of filling d		"T" later document published after the inte or priority date and not in conflict with clied to understand the principle or the investion "C" document of particular relevance; the cannot be considered novel or cannot	the application but early underlying the salmed invention
"O" docume other r		Involve an inventive step when the do "Y" document of particular relevance; the or cannot be considered to involve an in document is combined with one or m ments, such combination being obvior.	current is taken alone dairned invention ventive slep when the ore other such docu-
tater th	ni published prior to the international fläng date but en the priority date claimed	"A" document member of the same patent	family
	actual completion of the informational search  4 March 1998	Oate of mailing of the international sea	rch report
	neiling address of the ISA	30/03/1998 Authorized officer	
	European Patent Office, P.B. 5818 Patentiaan 2 NL - 2280 HV Rijewijk Tel. (-31-70) 340-2040, Tz. 31 651 epo nl,	Sogno, M	
	Fax: (+31-70) 340-3016	l andiin' is	·

Form PCT/ISA/210 (second sheet) (July 1982)

Ints. .donal Application No
PCT/FP 97/06671

	Mon) DOCUMENTS CONSIDERED TO BE RELEVANT	· · · · · · · · · · · · · · · · · · ·
tegory *	Citation of document, with indication where appropriate, of the relevant passages	Relevant to claim No.
	WO 95 25239 A (ATLAS COPCO GEOTECHNICAL DRILLING AB) 21 September 1995 see abstract	1,3-5
**	US 2 871 034 A (WILTSE) 27 January 1959 see column 1, line 59 - column 2, line 4	1,3,5,6
	GB 792 886 A (HUNTSINGER) 2 April 1958 see page 3, line 116 - line 124; figures 4,9,11	1,3,4,7
	US 3 585 803 A (BARDGETTE) 22 June 1971 see column 2, line 71 - column 3, line 1	1,3,4,7
	DE 90 13 606 U (BRM GMBH) 31 October 1991 see the whole document	1,3,7
	FR 1 565 562 A (RABUEL) 2 May 1969 see page 2, left-hand column, line 10 - right-hand column, line 4	1,3
	DE 41 33 802 C (HAWERKAMP) 22 October 1992 see the whole document	1,3
	WO 93 14284 A (WELAND AB) 22 July 1993 see page 4, line 4 - line 6 see page 5, line 6 - line 21	1,7
	DE 295 18 333 U (NOVOPRESS GMBH) 11 January 1996 see page 5, line 21 - line 26; figure 2	1
	EP 0 611 614 A (B & W FUEL COMPANY) 24 August 1994 see abstract	1
	DE 43 29 442 A (DEUTSCHE ALWA GMBH) 2 March 1995 see abstract	1
, х	WO 96 37680 A (SHELL INTERNATIONALE RESEARCH MAATSCHAPPIJ) 28 November 1996 see example 1	1-7
	see page 2, line 23 - line 28 see page 3, line 19 - line 25 see page 4, line 14 - line 17	
,x	WO 96 37681 A (PETROLINE WIRELINE SERVICES LIMITED) 28 November 1996 see the whole document	1-7
	-/	

1

information on patent family members

tnt. .donal Application No PCT/FP 97/06671

2	<del></del>	PCINE	P 97/06671
Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 3948321 A	06-04-76	NONE	
US 5366012 A	22-11-94	AU 672008 B	19-09-96
·		AU 4324593 A	04-01-94
		CA 2137565 A	23-12-93
		DE 69305852 D	12-12-96
		DE 69305852 T	22-05-97
		WO 9325800 A	23-12-93
		EP 0643795 A	22-03-95
		JP 7507611 T	24-08-95
		MD 960219 A	31-05-97
		NO 944746 A	03-02-95
		NZ 253125 A	27-02-96
US 3863959 A	04-02-75	CH 558872 A	14-02-75
		DE 2210980 A	23-08-73
		FR 2175229 A	19-10-73
		GB 1365657 A	04-09-74
		JP 48101614 A	21-12-73
DE 2434298 A	29-01-76	NONE	
WO 9525239 A	21-09-95	SE 503459 C	17-06-96
		AU 680753 B	07-08-97
		AU 2089095 A	03-10-95
		EP 0757768 A	12-02-97
		FI 963641 A	08-11-96
		NO 963833 A	25-10-96
		SE 9400867 A	16-09-95
US 2871034 A	27-01-59	NONE	
GB 792886 A		NONE	
JS 3585803 A	22-06-71	NONE	*********
DE 9013606 U	31-10-91	NONE	
FR 1565562 A	02-05-69	NONE	

Int. Atonal Application No. PCT/EP 97/06671

	MION) DOCUMENTS CONSIDERED TO BE RELEVANT		
ategory *	Castion of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.	
(,Ρ	WO 97 41377 A (B.D.KENDLE ENGINEERINGLIMITED ) 6 November 1997 see page 13, line 6 - line 9; figure 15 see page 7, line 19 - line 21; figure 6 see page 10, line 1 - line 3	1,3-6	
	•		
ļ		·	
	·		
·			
	-		
	_		

Information on patent family members

PCT/EP 97/06671

						,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,
	atent document d in search repo		Publication date	Patent family member(s)		Publication date
DE	4133802	С	22-10-92	NONE		· · · · · · · · · · · · · · · · · · ·
WO	9314284	A	22-07-93	SE 500185	С	02-05-94
				AT 154964	T	15-07-97
				DE 69220677	D	07-08-97
				DE 69220677	T	15-01-98
				EP 0624219	Α	17-11-94
				FI 943449	A	20-07-94
				NO 942659	A,B,	15-07-92
		~~ ~ ~~~~ ~ <u>~</u>		SE 9200179	A	22-07-93
DE	29518333	U	11-01-96	NONE		
EP	611614	A	24-08-94	WO 9419125	A	01-09-94
DE	4329442	A	02-03-95	NONE		
WO	9637680	A	28-11-96	AU 5826596	Α	11-12-96
				AU 7349396		11-12-96
				EP 0828918	Α	18-03-98
				EP 0824628	A	25-02-98
				WO 9637681	Α	28-11-96
			^~~~~~~~~~~~~	NO 975350	A	16-01-98
WO	9637681	A	28-11-96	AU 5826596	A	11-12-96
				AU 7349396		11-12-96
				WO 9637680		28-11-96
				EP 0828918	• •	18-03-98
				EP 0824628	• •	25-02-98
			~~~~~	NO 975350	Α	16-01-98
MO	9741377	Α	06-11-97	AU 2647497	Α	19-11-97

# This Page is Inserted by IFW Indexing and Scanning Operations and is not part of the Official Record.

#### **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:
☐ BLACK BORDERS
☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
☐ FADED TEXT OR DRAWING
☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
☐ SKEWED/SLANTED IMAGES
☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
☐ GRAY SCALE DOCUMENTS
☐ LINES OR MARKS ON ORIGINAL DOCUMENT
REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY

### IMAGES ARE BEST AVAILABLE COPY.

☐ OTHER:

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.